


## Features:

- Active low frequency speaker with one 15" woofer.
- Cabinet is made from polypropylene and special high-tech material in large injection mold . It's durable, anti-shock and has good damping characters.
- Voice coil in the 15" woofer is made from  $\varnothing$  75mm copper cladding aluminium ribbon wire. Its efficiency is 20% higher than normal round wires.
- Heavy duty protective grille.




Beta Three

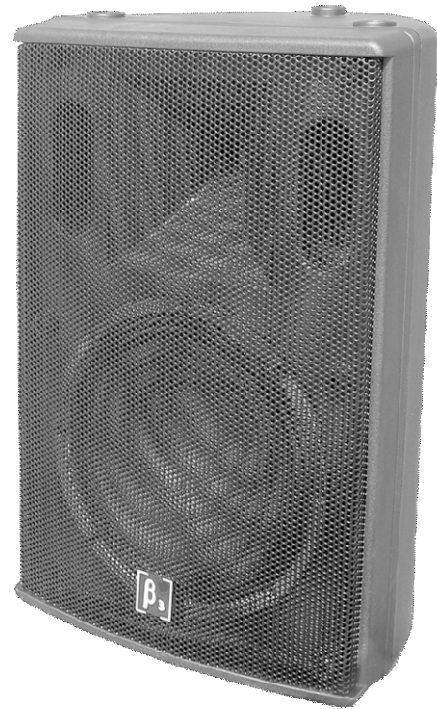

## Model:NI5Ba

### Technical Parameters

System:	Active low frequency speaker
Cabinet material:	Polypropylene, Trapezoid
Cabinet Colors:	Black, White, Blue, Gray
Drive Quantity:	1x15" (Bass)
High Cut Adjustable:	80Hz-250Hz
Max Sound Level(dB/1M):	120dB
Output Power:	400W
Distortion:	0.02%
Load Impedance:	4 Ohm
Input Impedance:	20 KOhm
Connectors:	XLR K3P
Power Supply:	AC 110V/220V, 50/60Hz
Dimensions(WxDxH mm/pcs):	485x460x700mm
Packing Dimensions(WxDxH mm/pcs)	545x515x800mm
Net Weight(Kg/pcs):	30.5Kg
Gross Weight(Kg/pcs):	33.7Kg

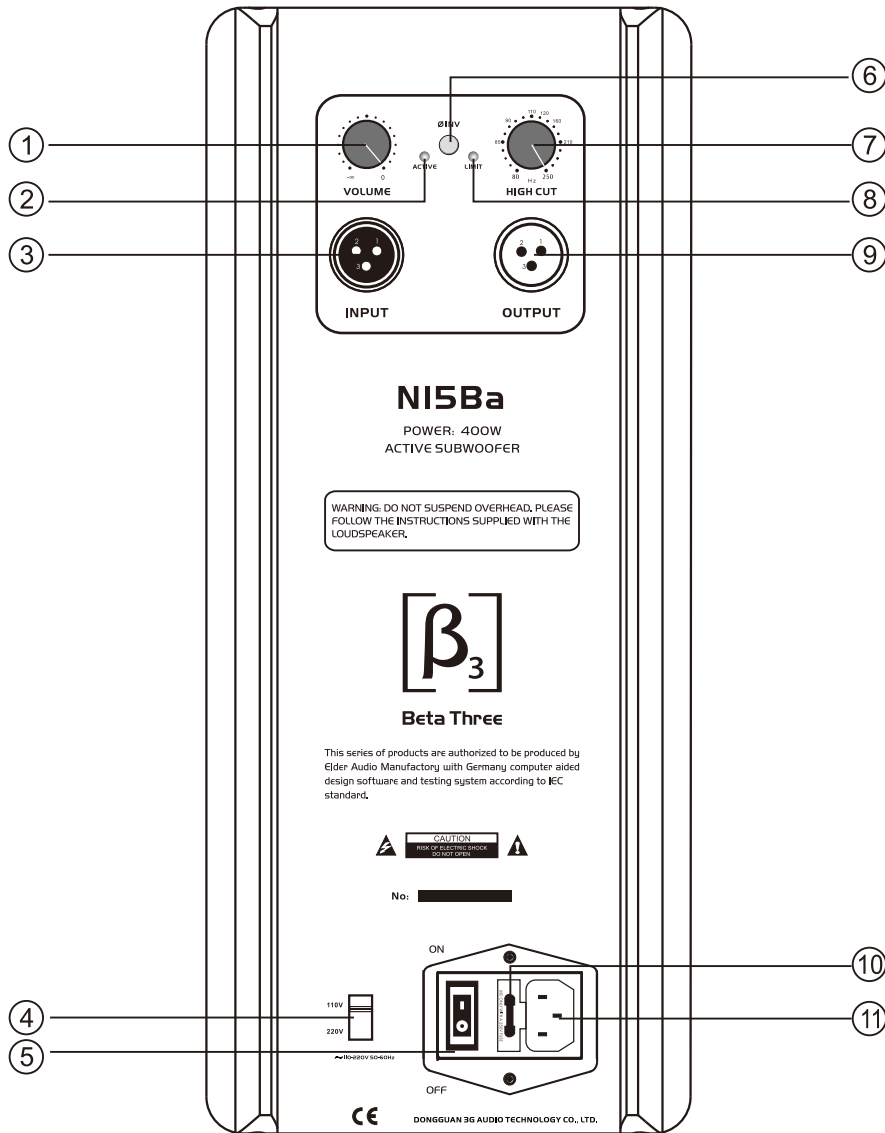

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>1. Volume control.</li> <li>2. Active indicator.</li> <li>3. Line/microphone input.</li> <li>4. 115V/230V voltage input selector.</li> <li>5. Power <b>ON/OFF</b> switch.</li> </ul> | <ul style="list-style-type: none"> <li>6. Phase inverting switch.</li> <li>7. High cut.(80Hz~250Hz adjustable)</li> <li>8. Limit indicator.</li> <li>9. Line/microphone output.</li> <li>10. Protection fuse.</li> <li>11. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> </ul> |
|---|--|

*Cosmetic changes may be made*