


Features:


- Two-way active speaker with one 8" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech Material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 8" woofer is made from Ø35mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 90° x 60° (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



Model: TW8a

Technical Parameters

System:	Built-in crossover two way full range active speaker	
Driver Quantity:	8"x1(Bass)	1 xØ 34mm Driver
Frequency Response(-3dB):	65Hz-18KHz	
Frequency Response(-10dB):	55Hz-18KHz	
Max Sound Level(dB/1M):	110dB	
Level Adjust Range:	±10dB(100Hz) - Bass ±10dB(10KHz) - Treb	
Output Power:	100W(Bass) + 50W(Treb)	
Distortion:	Line-0.02%, Microphone-0.04%	
Tweeter Dispersion(HxV):	90° X60°	
Load Impedance:	Treb - 80hm, Bass - 8 Ohm	
Input Impedance:	Line - 20KOhm, Microphone - 10KOhm	
Connectors:	XLR K3P	
Power Supply:	AC 110V-220V, 50/60Hz	
Dimensions(WxDxH mm/pcs):	277X265X407mm	
Packing Dimensions(WxDxH mm/pair)	595X310X460mm	
Net Weight(Kg/pcs):	8.6Kg	
Gross Weight(Kg/pair):	18.6Kg	

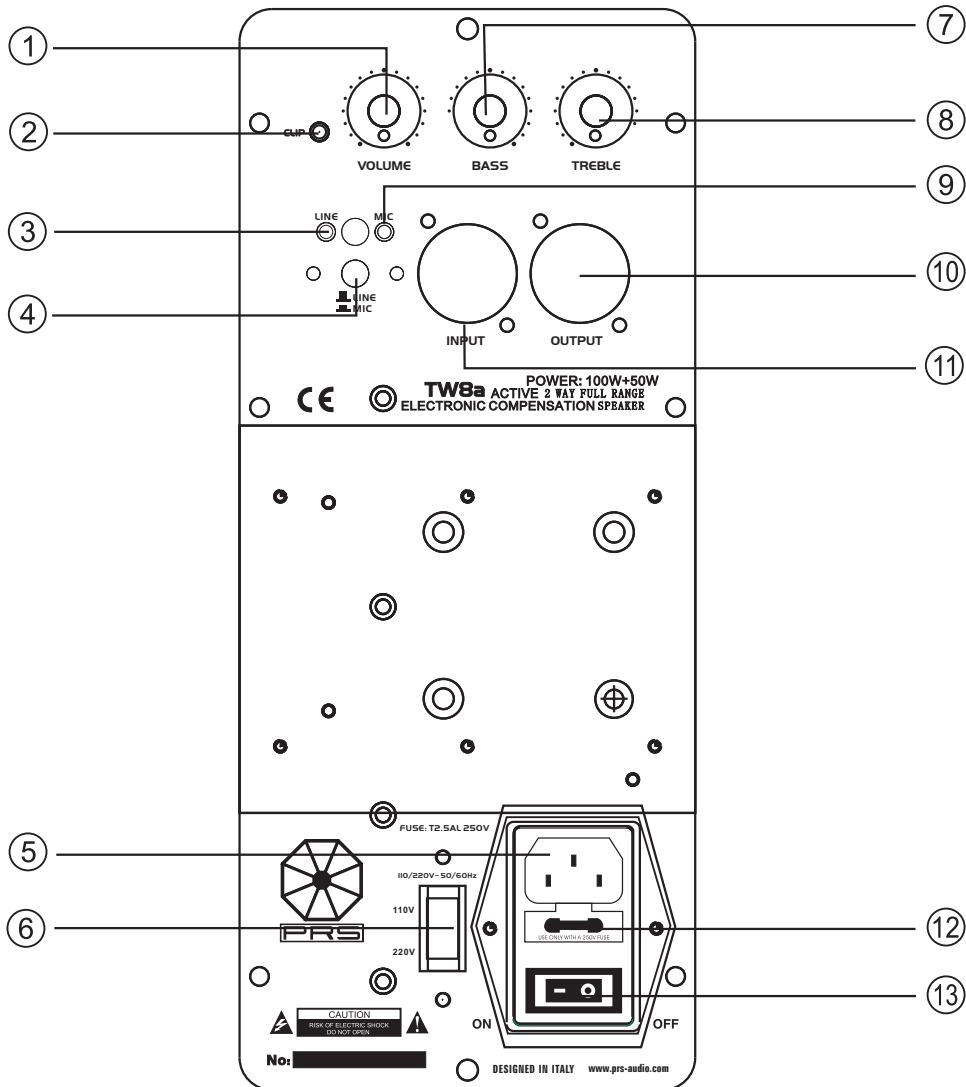

- | | |
|--|---|
| <ul style="list-style-type: none"> 1. Volume control 2. Clip indicator. 3. Line input signal presence indicator. 4. Line/microphone selector. 5. Power supply input. Make sure that the voltage selector is set for your country's correct voltage. 6. 110V-220V voltage input selector. 7. Bass control. 8. Treble control. | <ul style="list-style-type: none"> 9. Microphone input signal presence indicator. 10. Line/microphone output. 11. Line/microphone input. 12. Protection fuse. Use only fuses of the correct amp rating. 13. Power ON/OFF switch. |
|--|---|

