



QS Full Range Speaker



JOYFUL SOUND



QS series is 2-way full range speaker system with wide dispersion. Its sound is nature and clear while the cabinet is handy, compact and the appearance is elegant and fashionable. It is applicable in small and medium stages, commercial spaces, meeting rooms, KTV etc

The cabinet is injection moulded with high intensity polypropylene. The elegant shape design provides the best structural strength and acoustic performances. The cabinet and grille colors can be customized.



QS Speaker features a new paper cone high frequency speakers which greatly enhance the performance and power handling in the mid-high frequencies.

The optimized low frequency driver offers clear sound at high sound pressure.

The internal crossover with -12dB attenuation slope provides smooth frequency response.

Circuit protection ensures high reliability of the speaker.

Applications

Meeting room

Monitor

Shops

Restaurant

Multifunction Rooms

KTV



Installation

The QS speakers can be installed in various venues easily and conveniently using the M5/M8 specialized mounting accessories.

1. Wall Bracket



2. Ceiling



3. Wall




QS400


1. Hanging Bracket



2. Wall Bracket

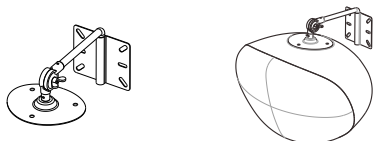

3. Stand Bracket

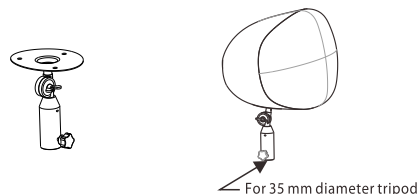

QS600 QS1000

System specification

	QS400	QS600/QS600T	QS1000/QS1000T
Acoustical			
Type	2-way full range speaker	2-way full range speaker	2-way full range speaker
Frequency Response(-3dB)	120Hz-20kHz	80Hz-16kHz	45Hz-20kHz
Sensitivity(1m/1W)	88dB	88dB	90dB
Max. SPL	102dB/108dB(peak)	114dB/120dB(peak)	117dB/123dB(peak)
Rated Power (RMS)	25W	80W	150W
Rated Impedance	8Ω	8Ω	8Ω
Coverage(H)	90°x90°	140°x160°	120°x120°
Cross over point	6.3kHz	2.5kHz	1.2kHz
Transducers			
HF	2 x 1"(25mm)	2 x 3"(75mm)	2 x 4"(100mm)
LF	1 x 4"	1 x 6"	1 x 10"
Physical			
Connectors	Input Push terminal (1+, 1-)	Push terminal (1+, 1-)	Push terminal (1+, 1-)
	Output -	-	Push terminal (2+, 2-)
Enclosure	Polypropylene injection moulding	Polypropylene injection moulding	Polypropylene injection moulding
Painting	With/without polyurethane spraying treatment (depends on colors) Cloth Grille	With/without polyurethane spraying treatment (depends on colors) Cloth Grille	With/without polyurethane spraying treatment (depends on colors) Cloth Grille
Handles	-	-	-
Rigging points	2xM5	3xM8	3xM8
Dimensions(W x D x H)	238x135x142mm(9.4x5.3x5.6in)	399x241x229mm(15.7x9.5x9in)	550x316x336mm(21.5x12.4x13.2in)
Package dimension:	372x192x310mm(14.6x7.6x12.2in)	452x310x525mm(17.8x12.2x20.1in)	620x385x425mm(24.4x15x16.7in)
Net Weight	4kg(8.8lb.)	9kg(19.8 lb.)	10.5kg(23.1 lb.)
Gross Weight (2pcs/pack)	5kg(11.0lb.)	10kg(22 lb.)	12.5kg(27.5 lb.)
Accessories	Wall bracket (included)	Ceiling bracket, Wall bracket, Stand bracket (optional)	