



“Creating The New Normal”



CS-1
Integrated AV System

The CS-1 integrated AV system is a simple “out of box” integrated solution that enables you to control both audio and video intuitively to meet the requirements of a demanding business environment.



Controller

The Controller, the heart of the system, stores video, music and photos. With inputs including microphone, audio and USB. Outputs, audio HDMI.

A carefully designed interface panel allows excellent control of various inputs, including video sources via touch panel, navigation keys and tone/volume controls.

On-board 4GB of memory to store Music, Photos and Video

Subwoofer/satellite systems

- > Elegant design
- > High output SPL and sensitivity
- > Deliver high fidelity and extended bandwidth reproduction of voice and music
- > Modular design allows for 2 or 4 satellites per sub module
- > Ability to link multiple systems together




Wide application

CS-1 integrated AV system is not only excellent for use as a foreground or background music system, but has the added bonus of being able to be used for exceptional speech reproduction. In addition, it enables you to control the presentation of audio visual material within your environment.


System diagram I

Small venue, bar, classroom, retail space

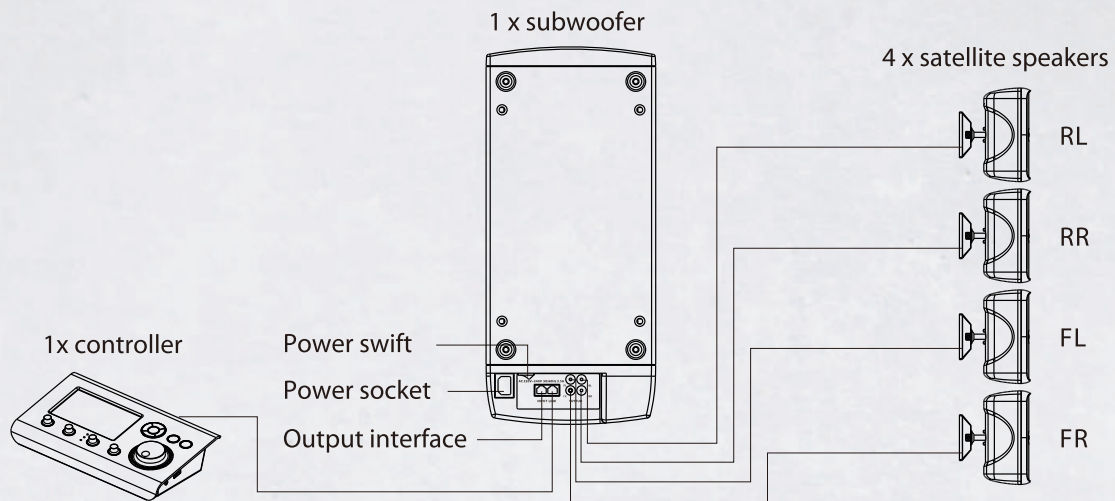

System diagram II

Medium venue, conference room, boardroom, restaurant

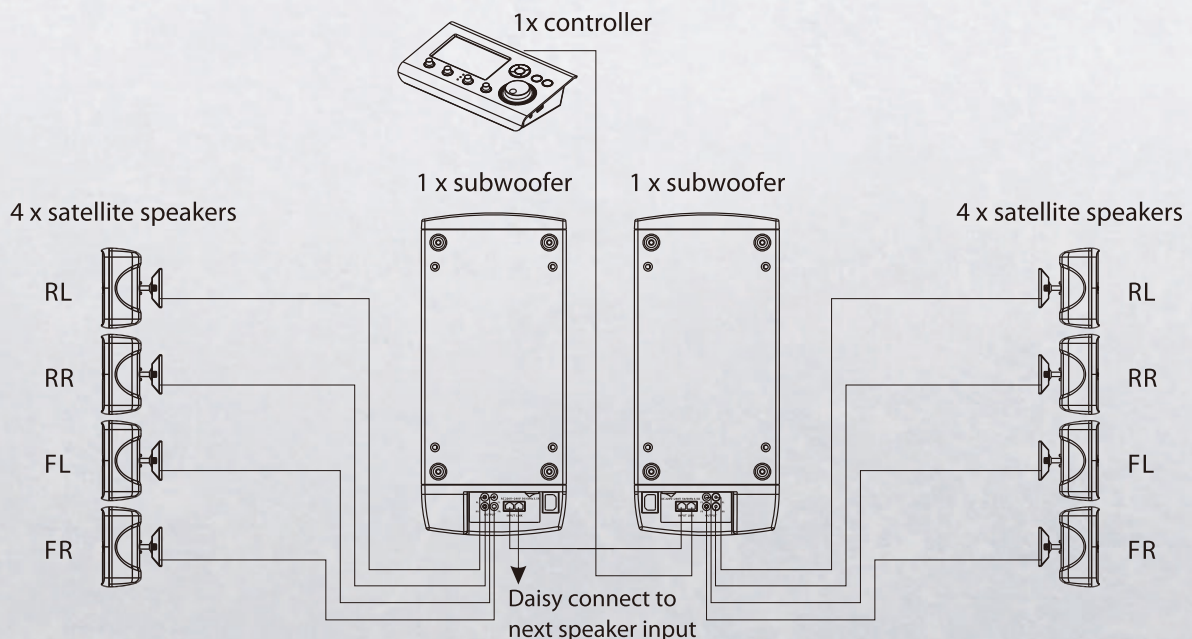

System configuration

The CS-1 integrated AV system is a complete solution in one box, everything you need is in the box, there is no need to go and buy cabling.

System includes:

- 1x6.5"active subwoofer
- 4xdual 2.75" satellite speakers
- 1xAV controller

Accessories:

- 4xsatellite speaker wall brackets
- 1xsubwoofer wall bracket
- Cables
- Optional satellite speaker ceiling brackets



Specification



Controller

- 4 inputs (USB, 3.5TRS, XLR mic and 2 x RCA)
- 4 outputs (HDMI, 1 x RCA video composite, left & right RCA, 1 x RJ45)
- A 4GB flash driver for storage of music, videos and photos
- Bass and treble control
- An input selection knob (USB, line, aux)
- Master volume
- Navigation controls
- Integrated LCD touch screen



Subwoofer

Constrution	Wooden cabinet
Transducers	1 x 6.5" LF
Frequency Response(-3dB)	35Hz-200Hz
Rated Power	100W(RMS)
Rated Impedance	4Ω
Dimensions (WxDxH)	215mmx497.6mmx400mm



Satellite speaker

Constrution	ABS cabinet
Transducers	2 x 2.75" full range
Frequency Response(-3dB)	200Hz-17kHz
Rated Power	30W(RMS)
Rated Impedance	8Ω
Dimensions (WxDxH)	90mmx136.5mmx180mm